

# Product datasheet

Specifications



## APC NetShelter Rack PDU Advanced, Metered, 7.4kW, 1Phase, 230V, 32A, 332P6, 40 Outlets

APDU10150ME

### Overview

Lead time Usually in Stock

### Main

Colour Black

Product or component type PDU

PDU type Metered

Cord length 3.0 m

### Complementary

Input Voltage 230 V 1 phase

Height 1490 mm

Width 56 mm

Output Voltage 230 V

Depth 75 mm

Net weight 6.2 kg

Mounting location Side

Mounting preference No preference

Input Plug Type IEC 60309 32 A 2P + PE

Mounting mode Rack-mounted

Rack units 0U

Mounting position Vertical

Communication port protocol 1000BASE-T  
10/100BASE-T

[In] rated current 32 A

Permissible voltage 200...240 V

Input current limits 32 A

Load capacity 7400 VA

Network frequency 50/60 Hz

Outlet type and quantity 20 C13/C15/C19/C21  
20C13/C15

### Environment

Product certifications TAA compliance  
UKCA

|  |                  |
|--|------------------|
| <b>Standards</b>                             | CE<br>EN 62368-1 |
| <b>Ambient air temperature for operation</b> | -5...60 °C       |
| <b>Relative humidity</b>                     | 5...95 %         |
| <b>Operating altitude</b>                    | 0...10000 ft     |
| <b>Ambient air temperature for storage</b>   | -25...65 °C      |
| <b>Storage Relative Humidity</b>             | 5...95 %         |
| <b>Storage altitude</b>                      | 0...15240 m      |

## Packing Units

|                                     |         |
|-------------------------------------|---------|
| <b>Unit Type of Package 1</b>       | PCE     |
| <b>Number of Units in Package 1</b> | 1       |
| <b>Package 1 Height</b>             | 172 cm  |
| <b>Package 1 Width</b>              | 11.6 cm |
| <b>Package 1 Length</b>             | 20.8 cm |
| <b>Package 1 Weight</b>             | 8.2 kg  |

## Contractual warranty

|                             |    |
|-----------------------------|----|
| <b>Warranty (in months)</b> | 36 |
|-----------------------------|----|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint 3174

## Use Better



### Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant

SCIP Number 31346aed-552c-4a16-81d9-e683a383b6da

REACH Regulation [REACH Declaration](#)

## Use Longer



### Lifetime extension

Repair No

## Use Again



### Repack and remanufacture

End of life manual availability [End of Life Information](#)

Take-back No


WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Image of product / Alternate images

Alternative

---

Multiple color options available

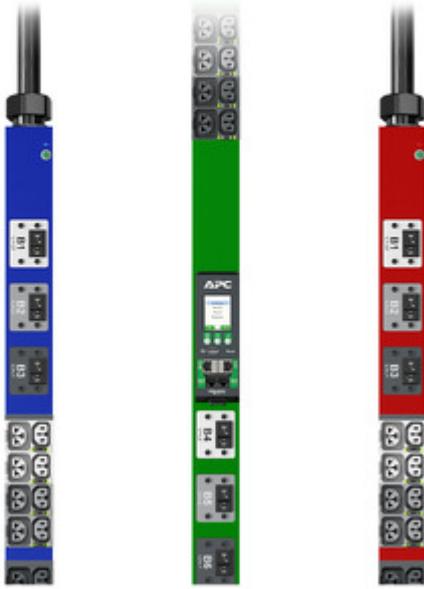

4-in-1 outlet for increased flexibility



Acts as any of these outlet types:



C13



C15



C19



C21





